

**DIRECTIONS:**

Be sure that powder has completely dissolved before running through equipment.


**High Pressure & Automatic Vehicle Wash:**  
Mix 1/2 to 1 oz of product per gallon of water or 2-3 lbs per 100 gallons of water.

**Manual Applications:** Use 1-2 oz per gallon of water.

Vehicle should be wet and cool prior to application. Spray solution onto surface. Agitate if needed with a soft brush. Allow 2-5 minutes of contact time. Do NOT allow solution to dry on surface. Rinse thoroughly with water.

# C-TRATE

## Heavy-Duty Non-Phosphate Truck Wash

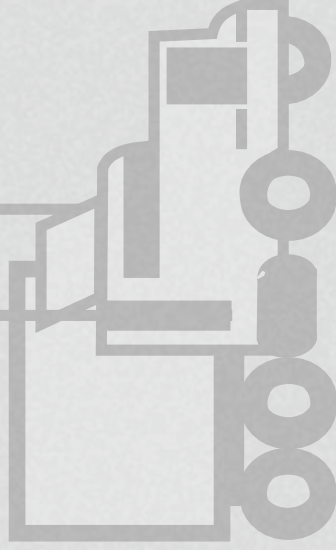

**WARNING**

**KEEP OUT OF REACH OF CHILDREN**  
Net Contents: 50 lb (22.7 kg)

**C-Trate** is designed for spray wand washing of trucks, rigs and fifth wheels. It cleans aluminum trailers safely and removes diesel smoke, road film, grease and dirt. It cuts truck washing time to a minimum.

**WARNING**

Causes skin irritation. Causes serious eye irritation.  
Wash hands thoroughly after handling. Wear protective gloves/eye protection.  
**IF ON SKIN:** Wash with plenty of soap and water. **IF skin irritation occurs, get medical advice/attention. IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists, get medical advice/attention.

**INGREDIENTS (CAS#):** NTA (139-13-9), Sodium Metasilicate (6834-92-0), Water (7732-18-5), Alcohol Ethoxyolate (68439-46-3), Surfactant (68081-81-2), Silica (112945-52-5).



0201-050



 **Detco**  
Detco Industries, Inc.  
Conway, AR  
1-800-282-2133  
[www.detco.com](http://www.detco.com)